




# Nuts

## Hex Jam Nuts

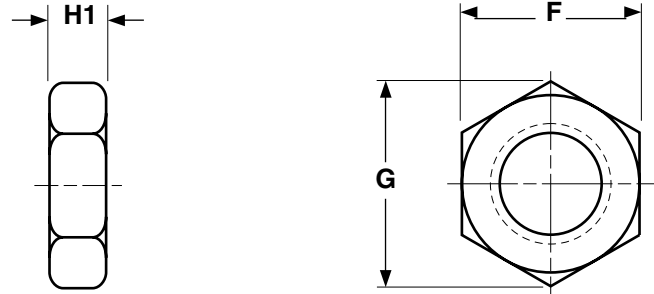

Nominal or Basic Major Diameter of Thread		F			G		H1		
		Width Across Flats			Width Across Corners		Thickness of Hex Jam Nuts		
		Basic	Max	Min	Max	Min	Basic	Max	Min
1/4	0.2500	7/16	0.438	0.428	0.505	0.488	5/32	0.163	0.150
5/16	0.3125	1/2	0.500	0.489	0.577	0.557	3/16	0.195	0.180
3/8	0.3750	9/16	0.562	0.551	0.650	0.628	7/32	0.227	0.210
7/16	0.4375	11/16	0.688	0.675	0.794	0.768	1/4	0.260	0.240
1/2	0.5000	3/4	0.750	0.736	0.866	0.840	5/16	0.323	0.302
9/16	0.5625	7/8	0.875	0.861	1.010	0.982	5/16	0.324	0.301
5/8	0.6250	15/16	0.938	0.922	1.083	1.051	3/8	0.387	0.363
3/4	0.7500	1-1/8	1.125	1.088	1.299	1.240	27/64	0.446	0.398
7/8	0.8750	1-5/16	1.312	1.269	1.516	1.447	31/64	0.510	0.458
1	1.0000	1-1/2	1.500	1.450	1.732	1.653	35/64	0.575	0.519
1-1/8	1.1250	1-11/16	1.688	1.631	1.949	1.859	39/64	0.639	0.579
1-1/4	1.2500	1-7/8	1.875	1.812	2.165	2.066	23/32	0.751	0.687
1-3/8	1.3750	2-1/16	2.062	1.994	2.382	2.273	25/32	0.815	0.747
1-1/2	1.5000	2-1/4	2.250	2.175	2.598	2.480	27/32	0.880	0.808
1-3/4	1.7500	2-5/8	2.625	2.538	3.031	2.893	31/32	1.009	0.929
2	2.0000	3	3.000	2.900	3.464	3.306	1-3/32	1.138	1.050
2-1/4	2.2500	3-1/2	3.500	3.388	4.041	3.862	1-13/64	1.251	1.155
2-1/2	2.5000	3-7/8	3.875	3.750	4.474	4.275	1-29/64	1.505	1.401

ANSI/ASME B18.2.2-1987

**The value-added source for quality bolts, screws, nuts, washers and other industrial fasteners.**

3211 West 9th Street, Trainer, PA 19061-5242 TOLL FREE: 1-800-662-7459 LOCAL: 610-485-5700 FAX: 610-485-5877

E-MAIL: [sales@coburnmyers.com](mailto:sales@coburnmyers.com)